

# ALUMINUM TUBING, PIPE AND SHAPES



SERVICE is our middle name

# ALUMINUM TUBING

**Specifications:** WW-T-700/2 Drawn 3003-H14  
 WW-T-700/4 Drawn 5052-0  
 WW-T-700/6 Drawn 6061-T6  
 QQ-A-200/8 Extruded 6061-T6511

WW-T-700/3 Drawn 2024-T3  
 QQ-A-200/3 Extruded 2024-T3511  
 QQ-A-200/11 Extruded 7075-T6511  
 ASTM B221/ASTM B241

WALL	THEOR. I.D.	WT. PER FOOT	TYPE		WALL	THEOR. I.D.	WT. PER FOOT	TYPE	
<b>3/16 OD</b>					<b>7/16 OD</b>				
.022	.144	.014	D	3003-H14	.035	.367	.052	D	6061-T6
.028	.132	.016	D	6061-T6	.049	.340	.070	D	6061-T6
.035	.117	.020	D	5052-0	.065	.308	.090	D	6061-T6
.035	.117	.020	D	6061-0	.120	.198	.141	D	6061-T6
.035	.117	.020	D	6061-T6	<b>1/2 OD</b>				
.049	.090	.025	D	6061-T6	.028	.444	.048	D	5052-0
<b>1/4 OD</b>					.028	.444	.049	D	6061-T6
.020	.210	.017	D	6061-T6	.035	.430	.061	D	2024-T3
.022	.206	.019	D	3003-H14	.035	.430	.060	D	5052-0
.028	.194	.023	D	5052-0	.035	.430	.060	D	6061-T6
.028	.194	.023	D	6061-T6	.049	.402	.083	D	2024-T3
.035	.180	.028	D	2024-T3	.049	.402	.081	D	5052-0
.035	.180	.028	D	3003-H14	.049	.402	.082	D	6061-T6
.035	.180	.028	D	5052-0	.049	.402	.082	D	6061-T6 HYDR
.035	.180	.028	D	6061-T6	.058	.384	.097	D	2024-T3
.049	.152	.036	D	2024-T3	.058	.384	.095	D	6061-T6
.049	.152	.037	D	5052-0	.058	.384	.095	E	6063-T52
.049	.152	.036	D	6061-T6	.065	.370	.107	D	2024-T3
.058	.134	.041	D	6061-T6	.065	.370	.103	D	5052-0
.065	.120	.044	D	6061-T6	.065	.370	.105	D	6061-T6
.083	.084	.051	D	6061-T6	.083	.334	.128	D	6061-T6
<b>5/16 OD</b>					.095	.310	.142	D	6061-T6
.028	.257	.030	D	6061-T6	.120	.260	.169	D	6061-T6
.035	.242	.036	D	5052-0	<b>9/16 OD</b>				
.035	.242	.036	D	6061-T6	.065	.433	.122	D	2024-T3
.049	.215	.048	D	6061-T6	.125	.313	.206	D	2024-T3
.058	.196	.055	D	6061-T6	.125	.313	.206	D	6061-T6
.065	.183	.059	D	6061-T6	<b>5/8 OD</b>				
<b>3/8 OD</b>					.028	.569	.062	D	6061-T6
.028	.319	.036	D	5052-0	.035	.555	.076	D	5052-0
.028	.319	.036	D	6061-T6	.035	.555	.076	D	6061-T6
.035	.305	.045	D	2024-T3	.049	.527	.103	D	5052-0
.035	.305	.044	D	3003-H14	.049	.527	.104	D	6061-T6
.035	.305	.044	D	5052-0	.058	.509	.124	D	2024-T3
.035	.305	.044	D	6061-T6	.058	.509	.122	D	6061-T6
.049	.277	.059	D	2024-T3	.065	.495	.137	D	2024-T3
.049	.277	.059	D	5052-0	.065	.495	.135	D	6061-T6
.049	.277	.059	D	6061-T6	.083	.459	.166	D	6061-T6
.058	.259	.068	D	6061-T6	.095	.435	.190	D	2024-T3
.065	.245	.076	D	6061-T6	.125	.375	.231	D	6061-T6
.083	.209	.090	D	6061-T6	<b>.711 OD</b>				
.090	.190	.097	D	2024-T3	.025	.661	.063	D	6061-T6
.095	.185	.098	D	6061-T6					

# ALUMINUM TUBING

**Specifications:** WW-T-700/2 Drawn 3003-H14  
 WW-T-700/4 Drawn 5052-0  
 WW-T-700/6 Drawn 6061-T6  
 QQ-A-200/8 Extruded 6061-T6511

WW-T-700/3 Drawn 2024-T3  
 QQ-A-200/3 Extruded 2024-T3511  
 QQ-A-200/11 Extruded 7075-T6511  
 ASTM B221/ASTM B241

WALL	THEOR. I.D.	WT. PER FOOT	TYPE	WALL	THEOR. I.D.	WT. PER FOOT	TYPE
<b>3/4 OD</b>				<b>1 OD Cont.</b>			
.035	.680	.094	D 2024-T3	.188	.624	.564	D 6061-T6
.035	.680	.093	D 6061-T6	.250	.500	.693	D 6061-T6
.049	.652	.130	D 2024-T3	.250	.500	.693	E 6061-T6
.049	.652	.126	D 5052-0	<b>1 1/8 OD</b>			
.049	.652	.127	D 6061-T6	.035	1.055	.141	D 6061-T6
.058	.634	.148	D 6061-T6	.049	1.027	.199	D 2024-T3
.058	.634	.151	D 2024-T3	.049	1.027	.195	D 6061-T6
.065	.620	.168	D 2024-T3	.058	1.009	.229	D 6061-T6
.065	.620	.165	D 6061-T6	.065	.995	.255	D 6061-T6
.083	.584	.209	D 2024-T3	.083	.959	.326	D 2024-T3
.083	.584	.205	D 6061-T6	.095	.935	.362	D 6061-T6
.095	.560	.235	D 2024-T3	.125	.875	.471	D 2024-T3
.095	.560	.228	D 6061-T6	.125	.875	.462	D 6061-T6
.120	.510	.285	D 2024-T3	.188	.749	.664	D 2024-T3
.125	.500	.289	D 6061-T6	.250	.625	.808	D 6061-T6
.188	.375	.390	D 6061-T6	.250	.625	.806	E 6061-T6
<b>7/8 OD</b>				<b>1 1/4 OD</b>			
.035	.805	.109	D 6061-T6	.035	1.180	.157	D 6061-T6
.049	.777	.152	D 2024-T3	.049	1.152	.215	D 5052-0
.049	.777	.150	D 6061-T6	.049	1.152	.217	D 6061-T6
.058	.759	.175	D 6061-T6	.058	1.134	.255	D 6061-T6
.065	.745	.199	D 2024-T3	.065	1.120	.290	D 2024-T3
.065	.745	.195	D 6061-T6	.065	1.120	.285	D 6061-T6
.083	.709	.243	D 6061-0	.083	1.084	.358	D 6061-T6
.083	.709	.243	D 6061-T6	.083	1.084	.365	D 2024-T3
.095	.685	.274	D 6061-T6	.095	1.060	.405	D 6061-T6
.120	.635	.335	D 6061-T6	.120	1.010	.511	D 2024-T3
.188	.500	.487	D 2024-T3	.120	1.010	.501	D 6061-T6
.250	.375	.577	D 6061-T6	.125	1.000	.520	E 6061-T6
<b>1 OD</b>				<b>1 3/8 OD</b>			
.035	.930	.125	D 6061-T6	.049	1.277	.240	D 6061-T6
.049	.902	.176	D 2024-T3	.058	1.259	.282	D 6061-T6
.049	.902	.170	D 5052-0	.065	1.245	.315	D 6061-T6
.049	.902	.172	D 6061-T6	.083	1.209	.396	D 6061-T6
.058	.884	.202	D 6061-T6	.125	1.125	.577	D 6061-T6
.065	.870	.229	D 2024-T3	.188	1.000	.841	D 2024-T3
.065	.870	.225	D 6061-T6	.188	1.000	.825	E 6061-T6
.083	.834	.287	D 2024-T3	.250	.875	1.039	D 6061-T6
.083	.834	.281	D 6061-T6	.250	.875	1.039	E 6061-T6
.083	.834	.281	E 6061-T6	.375	.625	1.385	E 6061-T6
.095	.810	.318	D 6061-T6				
.120	.760	.398	D 2024-T3				
.125	.750	.404	D 6061-T6				
.125	.750	.404	E 6063-T6				
.125	.750	.404	E 6061-T6				
.156	.687	.496	D 2024-T3				

# ALUMINUM TUBING

**Specifications:** WW-T-700/2 Drawn 3003-H14

WW-T-700/4 Drawn 5052-0

WW-T-700/6 Drawn 6061-T6

QQ-A-200/8 Extruded 6061-T6511

WW-T-700/3 Drawn 2024-T3

QQ-A-200/3 Extruded 2024-T3511

QQ-A-200/11 Extruded 7075-T6511

ASTM B221/ASTM B241

WALL	THEOR. I.D.	WT. PER FOOT	TYPE		WALL	THEOR. I.D.	WT. PER FOOT	TYPE	
<b>1 1/2 OD</b>					<b>1 7/8 OD</b>				
.035	1.430	.188	D	5052-0	.049	1.777	.331	D	6061-T6
.035	1.430	.190	D	6061-T6	.058	1.759	.389	D	6061-T6
.049	1.402	.260	D	5052-0	.083	1.709	.549	D	6061-T6
.049	1.402	.263	D	6061-T6	.125	1.635	.805	E	6061-T6
.058	1.384	.309	D	6061-T6	.188	1.500	1.196	E	6061-T6
.062	1.376	.329	E	6063-T6	.250	1.375	1.501	D	6061-T6
.065	1.370	.352	D	2024-T3	<b>2 OD</b>				
.065	1.370	.341	D	5052-0	.035	1.930	.254	D	6061-T6
.065	1.370	.345	D	6061-0	.049	1.902	.350	D	5052-0
.065	1.370	.345	D	6061-T6	.049	1.902	.353	D	6061-T6
.083	1.334	.435	D	6061-T6	.050	1.900	.360	E	6063-T6
.095	1.310	.493	D	6061-T6	.058	1.884	.416	D	6061-T6
.125	1.250	.635	D	6061-T6	.065	1.870	.479	D	2024-T3
.125	1.250	.635	E	6061-T6	.065	1.870	.465	D	6061-T6
.188	1.125	.911	D	2024-T3	.065	1.870	.465	E	6063-T6
.188	1.125	.911	E	6061-T6	.083	1.834	.588	D	6061-T6
.250	1.000	1.178	D	2024-T3	.095	1.810	.669	D	6061-T6
.250	1.000	1.155	E	6061-T6	.120	1.760	.851	D	2024-T3
.280	.940	1.263	D	6061-T6	.125	1.750	.866	D	6061-T6
.375	.750	1.559	D	6061-T6	.125	1.750	.866	E	6061-T6
<b>1 5/8 OD</b>					.125	1.750	.866	E	6063-T6
.035	1.555	.206	D	6061-T6	.188	1.624	1.259	E	6061-T6
.049	1.527	.285	D	6061-T6	.250	1.500	1.616	E	6061-T6
.058	1.509	.334	D	2024-T3	.250	1.500	1.616	E	6063-T6
.058	1.509	.336	D	6061-T6	.375	1.250	2.251	E	6061-T6
.065	1.495	.382	D	2024-T3	.500	1.000	2.771	E	6061-T6
.083	1.459	.483	D	6061-T6	<b>2 1/4 OD</b>				
.125	1.375	.693	E	6061-T6	.035	2.180	.286	D	6061-T6
.188	1.249	.998	D	6061-T6	.049	2.152	.399	D	6061-T6
.188	1.249	.998	E	6061-T6	.065	2.120	.525	D	6061-T6
.250	1.125	1.296	D	2024-T3	.083	2.084	.665	D	6061-T6
<b>1 3/4 OD</b>					.120	2.010	.973	D	2024-T3
.035	1.680	.220	D	5052-0	.125	2.000	.981	D	6061-T6
.035	1.680	.223	D	6061-T6	.125	2.000	.981	E	6061-T6
.049	1.652	.308	D	6061-T6	.125	2.000	.981	E	6063-T6
.058	1.634	.363	D	6061-T6	.188	1.875	1.432	E	6061-T6
.060	1.630	.376	E	6063-T6	.250	1.750	1.885	E	2024-T3
.065	1.620	.405	D	6061-T6	.250	1.750	1.847	E	6061-T6
.083	1.583	.511	D	2024-T3	.375	1.500	2.598	E	6061-T6
.083	1.584	.511	D	6061-T6	.500	1.250	3.233	E	6061-T6
.125	1.500	.750	E	6061-T6	<b>2 1/2 OD</b>				
.188	1.375	1.085	E	6061-T6	.035	2.430	.319	D	6061-T6
.250	1.250	1.414	D	2024-T3	.049	2.402	.444	D	6061-T4
.250	1.250	1.385	D	6061-T6	.049	2.402	.444	D	6061-T6
.250	1.250	1.385	E	6061-T6	.065	2.370	.592	D	2024-T3
.375	1.000	1.900	E	6061-T6					

# ALUMINUM TUBING

**Specifications:** WW-T-700/2 Drawn 3003-H14

WW-T-700/4 Drawn 5052-0

WW-T-700/6 Drawn 6061-T6

QQ-A-200/8 Extruded 6061-T6511

WW-T-700/3 Drawn 2024-T3

QQ-A-200/3 Extruded 2024-T3511

QQ-A-200/11 Extruded 7075-T6511

ASTM B221/ASTM B241

WALL	THEOR. I.D.	WT. PER FOOT	TYPE	
<b>2 1/2 OD Cont.</b>				
.065	2.370	.585	D	6061-T6
.065	2.370	.559	E	6063-T6
.083	2.334	.741	D	6061-T6
.120	2.260	1.044	D	2024-T3
.125	2.250	1.097	E	6061-T6
.188	2.125	1.606	E	6061-T6
.250	2.000	2.121	D	2024-T3
.250	2.000	2.078	E	6061-T6
.375	1.750	2.944	E	6061-T6
.500	1.500	3.695	E	6061-T6
.625	1.250	4.329	E	6061-T6

.500	1.625	4.001	E	6061-T6
------	-------	-------	---	---------

<b>2 3/4 OD</b>				
.063	2.624	.625	D	2024-0
.065	2.620	.645	D	6061-T6
.125	2.500	1.223	D	6061-T6
.125	2.500	1.223	E	6061-T6
.188	2.375	1.779	E	6061-T6
.250	2.250	2.309	E	6061-T6
.375	2.000	3.290	E	6061-T6
.500	1.750	4.241	E	2024-T3
.500	1.750	4.156	E	6061-T6

<b>3 OD</b>				
.028	2.944	.304	D	5052-0
.035	2.930	.380	D	5052-0
.035	2.930	.254	D	6061-T6
.042	2.916	.459	D	6061-T4
.049	2.902	.529	D	5052-0
.049	2.902	.534	D	6061-T6
.050	2.900	.545	E	6063-T6
.065	2.870	.726	D	2024-T3
.065	2.870	.705	D	6061-T6
.065	2.870	.705	E	6063-T6
.083	2.834	.895	D	6061-T6
.095	2.810	1.020	D	6061-T6
.125	2.750	1.328	E	6061-T6
.125	2.750	1.328	E	6063-T6
.188	2.625	1.953	E	6061-T6
.250	2.500	2.540	E	6061-T6
.313	2.375	3.099	E	2024-T3
.313	2.375	3.100	E	6061-T6
.375	2.250	3.637	E	6061-T6

WALL	THEOR. I.D.	WT. PER FOOT	TYPE	
<b>3 OD Cont.</b>				
.500	2.000	4.712	E	2024-T3
.500	2.000	4.618	E	6061-T6
.750	1.500	6.235	E	6061-T6
1.000	1.000	7.389	E	6061-T6

<b>3 1/4 OD</b>				
.065	3.120	.765	D	6061-T6
.125	3.000	1.443	D	6061-T6
.125	3.000	1.443	E	6061-T6
.250	2.750	2.771	E	6061-T6
.375	2.500	3.893	E	6061-T6
.500	2.250	5.080	E	6061-T6
.750	1.750	6.927	E	6061-T6

<b>3 1/2 OD</b>				
.035	3.430	.448	D	6061-0
.065	3.370	.825	D	6061-T6
.125	3.250	1.559	D	6061-T6
.188	3.124	2.300	E	6061-T6
.250	3.000	3.002	E	6061-T6
.375	2.750	4.330	E	6061-T6
.500	2.500	5.655	E	2024-T3
.500	2.500	5.540	E	6061-T6
.750	2.000	7.620	E	6061-T6

<b>3 3/4 OD</b>				
.250	3.250	3.233	E	6061-T6
.500	2.750	6.004	E	6061-T6
.750	2.250	8.313	E	6061-T6
1.000	1.750	10.159	E	6061-T6

<b>4 OD</b>				
.035	3.930	.513	D	6061-T6
.049	3.902	.715	D	6061-T6
.050	3.900	.730	E	6063-T6
.065	3.870	.935	D	5052-0
.065	3.870	.945	D	6061-T6
.072	3.856	1.045	E	6063-T6
.083	3.834	1.201	E	6063-T6
.125	3.750	1.790	E	6061-T6
.125	3.750	1.790	E	6063-T6
.188	3.624	2.648	E	6061-T6
.250	3.500	3.464	E	6061-T6
.375	3.250	5.022	E	6061-T6
.500	3.000	6.597	E	2024-T3
.500	3.000	6.465	E	6061-T6
.625	2.750	7.793	E	6061-T6
.750	2.500	9.005	E	6061-T6
1.000	2.000	11.084	E	6061-T6



# ALUMINUM TUBING

**Specifications:** WW-T-700/2 Drawn 3003-H14  
 WW-T-700/4 Drawn 5052-0  
 WW-T-700/6 Drawn 6061-T6  
 QQ-A-200/8 Extruded 6061-T6511

WW-T-700/3 Drawn 2024-T3  
 QQ-A-200/3 Extruded 2024-T3511  
 QQ-A-200/11 Extruded 7075-T6511  
 ASTM B221/ASTM B241

WALL	THEOR. I.D.	WT. PER FOOT	TYPE		WALL	THEOR. I.D.	WT. PER FOOT	TYPE	
<b>4 1/4 OD</b>					<b>5 1/2 cont.</b>				
.125	4.000	1.901	E	6061-T6	.750	4.000	13.162	E	6061-T6
.250	3.750	3.695	E	6061-T6	1.000	3.500	16.625	E	6061-T6
.375	3.500	5.369	E	6061-T6	<b>5 3/4 OD</b>				
.500	3.250	6.927	E	6061-T6	.375	5.000	7.450	E	6061-T6
1.000	2.250	12.010	E	6061-T6	<b>6 OD</b>				
<b>4 3/8 OD</b>					.058	5.884	1.273	E	6063-T6
.500	3.375	7.158	E	6061-T6	.083	5.834	1.814	E	6063-T6
<b>4 1/2 OD</b>					.125	5.750	2.713	E	6061-T6
.125	4.250	2.020	E	6061-T6	.188	5.625	4.037	E	6061-T6
.188	4.125	2.995	E	6061-T6	.250	5.500	5.311	E	6061-T6
.250	4.000	3.925	E	6061-T6	.375	5.250	7.793	E	6061-T6
.375	3.750	5.715	E	6061-T6	.500	5.000	10.370	E	2024-T3
.500	3.500	7.540	E	2024-T3	.500	5.000	10.160	E	6061-T6
.500	3.500	7.389	E	6061-T6	.750	4.500	14.547	E	6061-T6
.750	3.000	10.391	E	6061-T6	.750	4.500	14.993	E	7075-T6
.750	3.000	10.709	E	7075-T6	1.000	4.000	18.473	E	6061-T6
1.000	2.500	12.931	E	6061-T6	1.000	4.000	19.038	E	7075-T6
<b>4 3/4 OD</b>					<b>6 1/4 OD</b>				
.500	3.750	7.851	E	6061-T6	.500	5.250	10.622	E	6061-T6
<b>5 OD</b>					<b>6 1/2 OD</b>				
.049	4.092	.898	D	6061-T6	.250	6.000	5.733	E	6061-T6
.052	4.896	.951	E	6063-T6	.375	5.750	8.486	E	6061-T6
.078	4.824	1.418	E	6063-0	.500	5.500	11.084	E	6061-T6
.125	4.750	2.251	E	6061-T6	.750	5.000	16.420	E	6061-T6
.188	4.625	3.340	E	6061-T6	1.000	4.500	20.320	E	6061-T6
.250	4.500	4.387	E	6061-T6	<b>7 OD</b>				
.375	4.250	6.400	E	6061-T6	.064	6.872	1.640	E	6063-T6
.500	4.000	8.482	E	2024-T3	.250	6.500	6.235	E	6061-T6
.500	4.000	8.313	E	6061-T6	.500	6.000	12.007	E	6061-T6
.750	3.500	11.776	E	6061-T6	.750	5.500	17.318	E	6061-T6
.750	3.500	12.137	E	7075-T6	1.000	5.000	22.167	E	6061-T6
1.000	3.000	14.778	E	6061-T6	<b>7 1/2 OD</b>				
1.125	2.750	16.105	E	6061-T6	.250	7.000	6.969	E	6061-T6
<b>5 1/4 OD</b>					.500	6.500	12.931	E	6061-T6
.375	4.500	6.885	E	2024-T3	.750	6.000	19.276	E	6061-T6
.500	4.250	8.774	E	6061-T6	1.000	5.500	24.010	E	6061-T6
<b>5 1/2 OD</b>					<b>8 OD</b>				
.062	5.376	1.246	E	6063-T6	.072	7.856	2.109	E	6063-T6
.250	5.000	4.849	E	6061-T6	.125	7.750	3.637	E	6061-T6
.375	4.750	7.100	E	6061-T6	.125	7.750	3.637	E	6063-T6
.500	4.500	9.425	E	2024-T3					
.500	4.500	9.236	E	6061-T6					

# ALUMINUM TUBING

**Specifications:** WW-T-700/2 Drawn 3003-H14  
 WW-T-700/4 Drawn 5052-0  
 WW-T-700/6 Drawn 6061-T6  
 QQ-A-200/8 Extruded 6061-T6511


WW-T-700/3 Drawn 2024-T3  
 QQ-A-200/3 Extruded 2024-T3511  
 QQ-A-200/11 Extruded 7075-T6511  
 ASTM B221/ASTM B241

WALL	THEOR. I.D.	WT. PER FOOT	TYPE	
<b>8 OD Cont.</b>				
.250	7.500	7.158	E	6061-T6
.375	7.250	10.564	E	6061-T6
.500	7.000	13.855	E	6061-T6
.750	6.500	20.089	E	6061-T6
1.000	6.000	25.862	E	6061-T6
<b>8 1/2 OD</b>				
.500	7.500	14.780	E	6061-T6
.750	7.000	21.474	E	6061-T6
1.000	6.500	27.700	E	6061-T6
<b>9 OD</b>				
.250	8.500	8.082	E	6061-T6
.500	8.000	15.702	E	6061-T6
.750	7.500	22.860	E	6061-T6
1.000	7.000	29.500	E	6061-T6
<b>9 1/2 OD</b>				
.625	8.250	20.493	E	6061-T6
.750	8.000	24.245	E	6061-T6
<b>10 OD</b>				
.250	9.500	9.006	E	6061-T6
.375	9.250	13.330	E	6061-T6
.500	9.000	17.549	E	6061-T6
1.000	8.000	33.251	E	6061-T6
<b>10 1/2 OD</b>				
.750	9.000	27.020	E	6061-T6
1.000	8.500	35.102	E	6061-T6
<b>11 OD</b>				
.500	10.000	19.396	E	6061-T6
.750	9.500	28.401	E	6061-T6
<b>12 OD</b>				
.250	11.500	10.853	E	6061-T6
.375	11.250	16.108	E	6061-T6
.500	11.000	21.243	E	6061-T6
.750	10.500	31.173	E	6061-T6
1.000	10.000	40.640	E	6061-T6
<b>16 OD</b>				
.500	15.000	28.633	E	6061-T6



# ALUMINUM TUBING

---

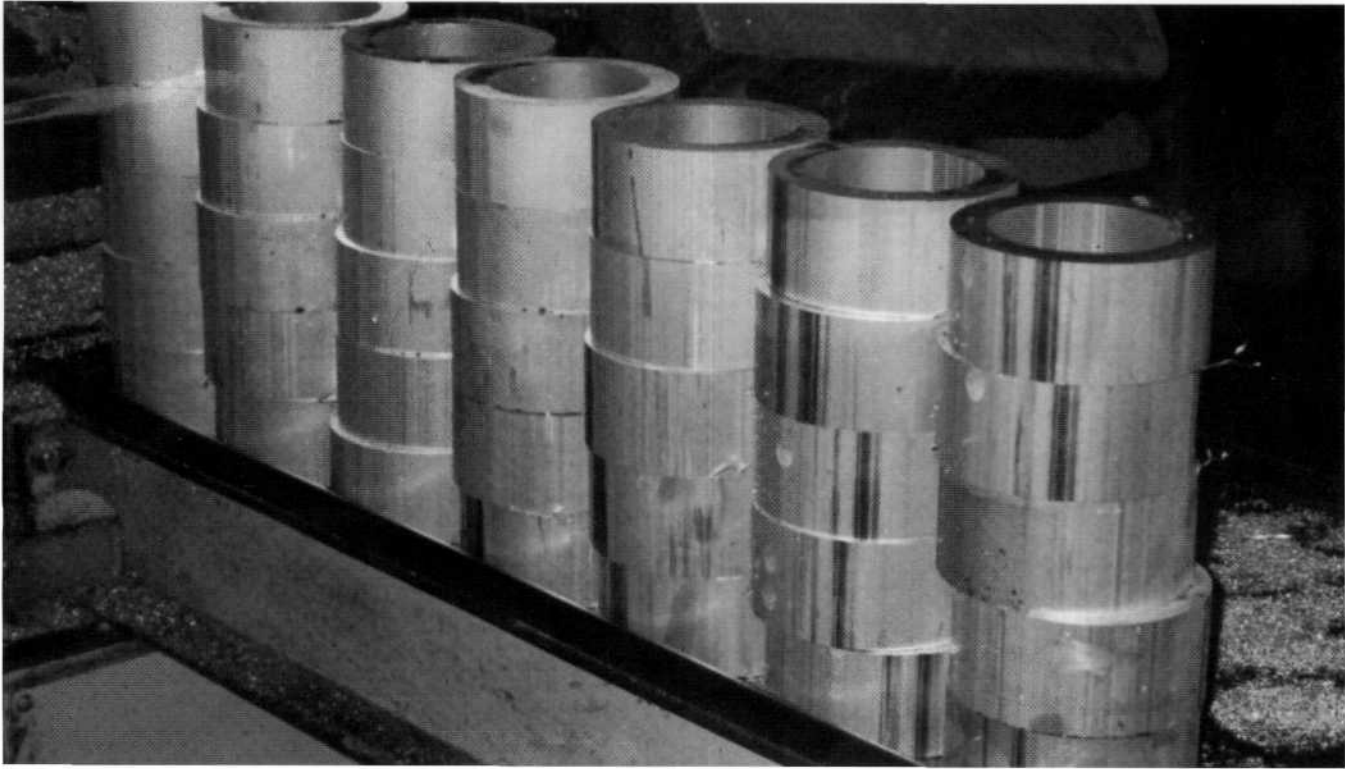



# ALUMINUM SHAPES

WALL	WT. PER FOOT	TYPE	WALL	WT. PER FOOT	TYPE
<b>Square</b>			<b>5 X 5 OD</b>		
<b>1/2 X 1/2 OD</b>			.188	4.245	6063-T52
.058	.116	6061-T6	<b>6 X 6 OD</b>		
<b>3/4 X 3/4 OD</b>			.250	6.762	6061-T6
.049	160	2024-T3	.500	12.431	6061-T6
.065	.216	6061-T6	<b>Rectangular</b>		
.065	.216	6063-T52	<b>1/2 X 1 OD</b>		
.125	.376	6061-T6	.065	.206	6061-T6
.125	.376	6063-T52	.125	.383	6061-T6
<b>1 X 1 OD</b>			.125	.383	6063-T52
.049	.202	2024-T3	<b>3/4 X 1 1/2 OD</b>		
.062	.280	6063-T52	.125	.604	6063-T52
.065	.281	6061-T6	<b>1 X 1 1/2 OD</b>		
.065	.281	6063-T6	.065	.408	6061-T6
.125	.526	6061-T6	.125	.675	6061-T6
.125	.526	6063-T52	.125	.675	6063-T52
<b>1 1/4 X 1 1/4 OD</b>			<b>1 X 2 OD</b>		
.125	.674	6063-T52	.125	.824	6063-T52
<b>1 1/2 X 1 1/2 OD</b>			.125	.824	6061-T6
.065	.448	6063-T52	<b>1 X 3 OD</b>		
.094	.566	6063-T6	.125	1.126	6063-T52
.125	.826	6061-T6	<b>1 1/4 X 2 OD</b>		
.125	.826	6063-T52	.125	.866	6063-T52
.188	1.150	6061-T6	<b>1 1/4 X 2 1/2 OD</b>		
.250	1.470	6061-T6	.125	1.050	6063-T52
<b>1 3/4 X 1 3/4 OD</b>			<b>1 1/2 X 2 OD</b>		
.125	.974	6063-T52	.125	.976	6063-T52
<b>2 X 2 OD</b>			<b>1 1/2 X 2 1/2 OD</b>		
.125	1.126	6061-T6	.125	1.125	6063-T52
.125	1.126	6063-T52	<b>1 1/2 X 3 OD</b>		
.188	1.638	6061-T6	.125	1.274	6061-T6
.250	2.060	6061-T6	.125	1.274	6063-T52
<b>2 1/2 X 2 1/2 OD</b>			<b>1 3/4 X 3 OD</b>		
.125	1.412	6063-T52	.125	1.365	6063-T52
.250	2.646	6061-T6	<b>1 3/4 X 4 OD</b>		
<b>3 X 3 OD</b>			.125	1.633	6063-T52
.125	1.690	6063-T52	<b>1 3/4 X 5 OD</b>		
.188	2.523	6061-T6	.125	1.927	6063-T52
.250	3.300	6061-T6			
<b>4 X 4 OD</b>					
.125	2.326	6063-T52			
.188	3.407	6061-T6			
.250	4.463	6061-T6			
.500	8.232	6061-T6			

# ALUMINUM SHAPES

WALL	WT. PER FOOT	TYPE	WALL	WT. PER FOOT	TYPE
<b>2 X 3 OD</b>			<b>3 X 4 OD</b>		
.125	1.412	6063-T52	.250	3.822	6061-T6
.250	2.646	6061-T6	<b>3 X 5 OD</b>		
<b>2 X 4 OD</b>			.125	2.325	6063-T52
.125	2.126	6063-T52	<b>3 X 6 OD</b>		
.250	3.300	6061-T6	.188	3.891	6063-T52
<b>2 X 5 OD</b>			<b>4 X 6 OD</b>		
.125	2.015	6063-T52	.250	5.586	6061-T6
<b>2 X 6 OD</b>			<b>4 X 8 OD</b>		
.125	2.325	6063-T52	.250	6.693	6061-T6
.250	4.410	6061-T6			



# ALUMINUM PIPE

**Specifications:** ASTM B-241 6061-T6  
ASTM B-241 3003-H12

ASTM B-241 6063-T6  
ASTM B-429 6061/6063

OD	WALL	THEOR. I.D.	WT. PER FOOT	TYPE	OD	WALL	THEOR. I.D.	WT. PER FOOT	TYPE
1/8 Sch 40 (.405)	.068	.269	.085	6061-T6	2 1/2 Sch 10 (2.875)	.120	2.635	1.055	6063-T6
1/4 Sch 40 (.540)	.088	.364	.147	6061-T6	2 1/2 Sch 40 (2.875)	.203 .203	2.469 2.469	1.964 2.004	5086-H32 6061-T6
1/4 Sch 80 (.540)	.119	.302	.185	6061-T6	2 1/2 Sch 80 (2.875)	.276	2.323	2.650	6061-T6
3/8 Sch 40 (.675)	.091	.493	.196	6061-T6	3 Sch 5 (3.500)	.083	3.334	1.048	6063-T6
1/2 Sch 40 (.840)	.109 .109	.622 .622	.294 .294	6061-T6 6063-T6	3 Sch 10 (3.500)	.120	3.260	1.498	6063-T6
1/2 Sch 80 (.840)	.147	.546	.376	6061-T6	3 Sch 40 (3.500)	.216 .216	3.068 3.068	2.567 2.621	5086-H32 6061-T6
3/4 Sch 40 (1.050)	.113 .113 .113	.824 .824 .824	.383 .391 .391	5086-H32 6061-T6 6063-T6	3 Sch 80 (3.500)	.300	2.900	3.547	6061-T6
3/4 Sch 80 (1.050)	.154	.742	.510	6061-T6	3 1/2 Sch 40 (4.000)	.226	3.548	3.151	6061-T6
1 Sch 40 (1.315)	.133 .133 .133	1.049 1.049 1.049	.569 .581 .581	5086-H32 6061-T6 6063-T6	3 1/2 Sch 80 (4.000)	.318	3.364	4.326	6061-T6
1 Sch 80 (1.315)	.179 .179	.957 .957	.736 .751	5086-H32 6061-T6	4 Sch 10 (4.500)	.120	4.260	1.942	6063-T6
1 1/4 Sch 10 (1.660)	.109	1.442	.624	6063-T6	4 Sch 40 (4.500)	.237 .237 .237	4.026 4.026 4.026	3.657 3.733 3.733	5086-H32 6061-T6 6063-T6
1 1/4 Sch 40 (1.660)	.140 .140 .140	1.380 1.380 1.380	.770 .788 .786	5086-H32 6061-T6 6063-T6	4 Sch 80 (4.500)	.337 .337	3.826 3.826	5.076 5.183	5086-H32 6061-T6
1 1/4 Sch 80 (1.660)	.191	1.278	1.037	6061-T6	5 Sch 40 (5.563)	.258 .258 .258	5.047 5.047 5.047	4.956 5.057 5.057	5086-H32 6061-T6 6063-T6
1 1/2 Sch 5 (1.900)	.065	1.770	.441	6063-T6	5 Sch 80 (5.563)	.375	4.813	7.188	6061-T6
1 1/2 Sch 10 (1.900)	.109	1.682	.721	6063-T6	6 Sch 40 (6.625)	.280	6.056	6.564	6061-T6
1 1/2 Sch 40 (1.900)	.145 .145 .145	1.610 1.610 1.610	.920 .940 .940	5086-H32 6061-T6 6063-T6	6 Sch 80 (6.625)	.432	5.761	9.884	6061-T6
1 1/2 Sch 80 (1.900)	.200 .200	1.500 1.500	1.256 1.256	5086-H32 6061-T6	8 Sch 40 (8.625)	.322	7.981	9.876	6061-T6
2 Sch 10 (2.375)	.109	2.157	.913	6063-T6	8 Sch 80 (8.625)	.500	7.625	15.010	6061-T6
2 Sch 40 (2.375)	.154 .154 .154	2.067 2.067 2.067	1.239 1.264 1.264	5086-H32 6061-T6 6063-T6	10 Sch 40 (10.750)	.365	10.020	14.000	6061-T6
2 Sch 80 (2.375)	.218 .218 .218	1.939 1.939 1.939	1.703 1.737 1.737	5086-H32 6061-T6 6063-T6	12 Sch 40 (12.750)	.375	12.000	17.140	6061-T6

# CUT TO LENGTH

---

